

Cat® C13

Diesel Generator Sets



Standby & Prime: 60 Hz



Image shown might not reflect actual configuration.

Engine Model	Cat® C13 In-line 6, 4-cycle Diesel
Bore x Stroke	130 mm x 157 mm (5.1 in x 6.2 in)
Displacement	12.5 L (763 in ³)
Compression Ratio	16.3:1
Aspiration	Turbocharged Air-to-Air Aftercooled
Fuel Injection System	MEUI
Governor	Electronic ADEM™ A4 – G3 Class* capable

Model	Standby	Prime	Emission Strategy
C13	350 ekW, 437.50 kVA	320 ekW, 400 kVA	TIER III Non-Road

PACKAGE PERFORMANCE


Performance	Standby	Prime
Frequency	60 Hz	
Genset Power Rating	437.50 kVA	400 kVA
Genset power rating with fan @ 0.8 power factor	350 ekW	320 ekW
Emissions	TIER III Non-Road	
Performance Number	EM1692	EM1693
Fuel Consumption		
100% load with fan, L/hr (gal/hr)	93.4 (24.6)	87.3 (23.0)
75% load with fan, L/hr (gal/hr)	80.1 (21.1)	75.0 (19.8)
50% load with fan, L/hr (gal/hr)	58.8 (15.5)	54.5 (14.3)
25% load with fan, L/hr (gal/hr)	33.6 (8.8)	31.3 (8.2)
Cooling System ¹		
Radiator air flow restriction (system), kPa (in. water)	0.12 (0.48)	0.12 (0.48)
Radiator air flow, m ³ /min (CFM)	497 (17551)	497 (17551)
Engine coolant capacity, L (gal)	14.2 (3.8)	14.2 (3.8)
Radiator coolant capacity, L (gal)	30 (8)	30 (8)
Total coolant capacity, L (gal)	34 (12)	34 (12)
Inlet Air		
Combustion air inlet flow rate, m ³ /min (CFM)	25.0 (882.8)	24.2 (854.6)
Max. Allowable Combustion Air Inlet Temp, °C (°F)	49 (120)	49 (121)
Exhaust System		
Exhaust stack gas temperature, °C (°F)	572 (1061.6)	565 (1049)
Exhaust gas flow rate, m ³ /min (CFM)	74.2 (2620.3)	71.1 (2510.8)
Exhaust system backpressure (maximum allowable), kPa (in. water)	10.0 (40.0)	10.0 (40.0)
Heat Rejection		
Heat rejection to jacket water, kW (BTU/min)	145 (8246)	136 (7734)
Heat rejection to exhaust (total), kW (BTU/min)	365 (20757)	345 (19619)
Heat rejection to aftercooler, kW (BTU/min)	55.9 (3179)	50.7 (2883)
Heat rejection to atmosphere from engine, kW (BTU/min)	48.3 (2746)	47.1 (2678)
Heat rejection from alternator, kW (BTU/min)	23.5 (1336)	21.2 (1206)

Emissions (Nominal) ²						Standby		Prime	
NOx, mg/Nm ³ (g/hp-hr)						2,274.7 (4.58)		1,968.7 (4.04)	
CO, mg/Nm ³ (g/hp-hr)						666.9 (1.35)		700.6 (1.45)	
HC, mg/Nm ³ (g/hp-hr)						6.2 (0.01)		7.5 (0.02)	
PM, mg/Nm ³ (g/hp-hr)						39.4 (0.1)		41.6 (0.1)	

Alternator ³											
Duty Cycle		Standby						Prime			
Phase		3-Phase						3-Phase			
Voltages*, V		208	220	240	380	480	600	208	220	240	
Current, Amps		1214	1148	1053	665	526	421	1110	1050	827	
Frame: LC6124D Excitation: AREP	Temperature Rise @ 40°C	105	105	105		105	105	80	80	80	80
	Motor Starting Capability @ 30% Voltage Dip, skVA	1008	1118	1309		1309	1408	1008	1118	1309	1309
Frame: LC6124B Excitation: AREP	Temperature Rise @ 40°C	105	130	130		130	130	80	105	105	105
	Motor Starting Capability @ 30% Voltage Dip, skVA	812	901	1055		1055	1057	812	901	1055	1055
Frame: LC6114D Excitation: SE	Temperature Rise @ 40°C	105	105	105		105		80	80	80	80
	Motor Starting Capability @ 30% Voltage Dip, skVA	839	930	1089		1089		839	930	1089	1089
Frame: LC6114B Excitation: SE	Temperature Rise @ 40°C	130	130	130	150	130		105	105	105	105
	Motor Starting Capability @ 30% Voltage Dip, skVA	677	751	880	513	880		677	751	880	513

*Note: 220V and 380V are additional offerings for the Latin America Market.

WEIGHTS & DIMENSIONS

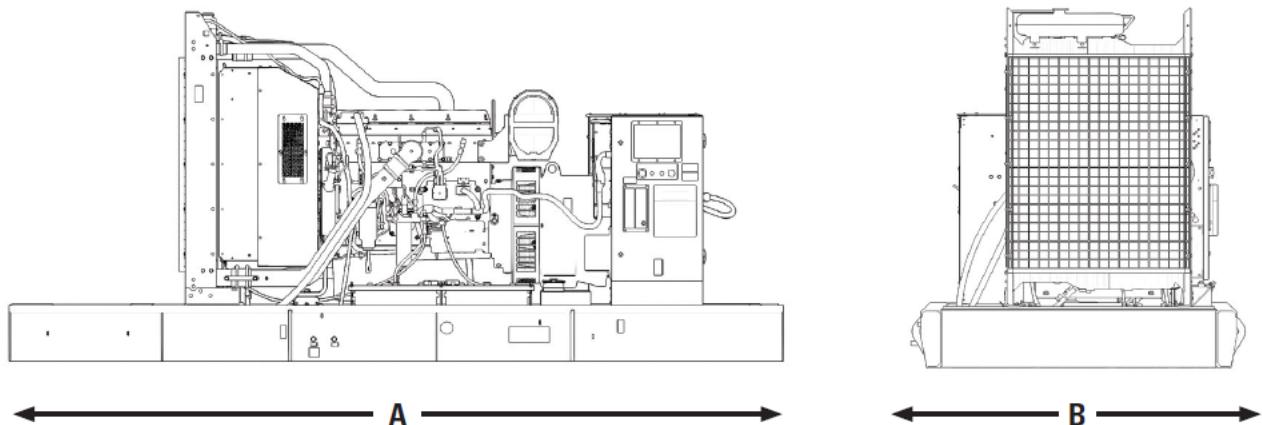

Dim "A" mm (in)	Dim "B" mm (in)	Dim "C" mm (in)	Dry Weight kg (lb)
3505 (138)	1652 (65)	2069 (82)	3696 (8147)

Note: General configuration not to be used for installation. See general dimension drawings for detail.

APPLICABLE CODES AND STANDARDS:

CSA C22.2 No 100-04, UL489, UL869, UL2200, IBC, IEC60034-1, ISO 3046, ISO 8528, NEMA MG 1-22, NEMA MG 1-33 and facilitates the compliance to NFPA 37, NFPA70, NFPA 99, NFPA110.

Note: Codes may not be available for all model configurations. Site level review needed for NFPA 70. Please consult your Cat Dealer for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

PRIME: Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO 3046 standard conditions.

FUEL RATES: Based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/litre (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Caterpillar representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 BTU/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

³ UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.

*Governing Class capability as per ISO 8528-5. Consult your local Cat dealer for configuration and site specific transient performance classification.