

Cat® C18

Diesel Generator Sets



Standby & Prime: 60 Hz



Engine Model	Cat® C18 In-line 6, 4-cycle Diesel
Bore x Stroke	145 mm x 183 mm (5.7 in x 7.2 in)
Displacement	18.13 L (1106.3 in ³)
Compression Ratio	16.1:1
Aspiration	Turbocharged Air-to-Air Aftercooled
Fuel Injection System	Electronic Unit Injection
Governor	Electronic ADEM™ A4 – G3 Class* capable

Image shown might not reflect actual configuration.

Model	Standby	Prime	Emission Strategy
C18	625 kVA, 500 ekW	569 kVA, 455 ekW	US EPA TIER IV Final, Non-Road

PACKAGE PERFORMANCE


Performance		Standby	Prime
Frequency		60 Hz	
Genset Power Rating		625 kVA	569 kVA
Genset power rating with fan @ 0.8 power factor		500 ekW	455 ekW
Emissions		US EPA TIER IV Final, Non-Road	
Performance Number		EM1017	EM1112
Fuel Consumption			
100% load with fan, L/hr (gal/hr)		136.9 (36.1)	123.8 (32.7)
75% load with fan, L/hr (gal/hr)		104.3 (27.5)	94.6 (24.9)
50% load with fan, L/hr (gal/hr)		74.2 (19.6)	67.7 (17.8)
25% load with fan, L/hr (gal/hr)		46.0 (12.1)	42.3 (11.1)
Cooling System ¹			
Radiator air flow restriction (system), kPa (in. water)		0.12 (0.48)	0.12 (0.48)
Radiator air flow, m ³ /min (CFM)		804 (28393)	804 (28393)
Engine coolant capacity, L (gal)		26.9 (7.1)	26.9 (7.1)
Radiator coolant capacity, L (gal)		61 (16.11)	61 (16.11)
Total coolant capacity, L (gal)		87.9 (23.2)	87.9 (23.2)
Inlet Air			
Combustion air inlet flow rate, m ³ /min (CFM)		37.9 (1340)	36.3 (1208)
Max. Allowable Combustion Air Inlet Temp, °C (°F)		50 (122)	
Exhaust System			
Exhaust stack gas temperature, °C (°F)		447 (836.8)	426.3 (799.3)
Exhaust gas flow rate, m ³ /min (CFM)		69.8 (2465.3)	66.5 (2349.7)
Exhaust system backpressure (maximum allowable), kPa (in. water)		10.0 (40.0)	10.0 (40.0)
Heat Rejection			
Heat rejection to jacket water, kW (BTU/min)		282 (16037)	256 (14558)
Heat rejection to exhaust (total), kW (BTU/min)		435 (24738)	392 (22292)
Heat rejection to aftercooler, kW (BTU/min)		114 (6483)	102 (5800)
Heat rejection to atmosphere from engine, kW (BTU/min)		101 (5743)	94.1 (5351)
Heat rejection from alternator, kW (BTU/min)		33.0 (1877)	32.0 (1820)

Emissions (Nominal)²		Standby	Prime
NOx, mg/Nm ³ (g/hp-hr)		100.5 (0.2)	122.8 (0.26)
CO, mg/Nm ³ (g/hp-hr)		NA	NA
HC, mg/Nm ³ (g/hp-hr)		4.9 (0.01)	3.9 (0.01)
PM, mg/Nm ³ (g/hp-hr)		2.2 (0.01)	1.6 (0.00)

Alternator³						
Duty Cycle		Standby			Prime	
Phase		3-Phase			3-Phase	
Voltages*, V		208	480	600	208	480
Current, Amps		1735	752	601	1579	684
Frame: LC6124G	Temperature Rise @ 40°C	130	105	105	130	105
Excitation: AREP	Motor Starting Capability @ 30% Voltage Dip, skVA	1335	1729	1731	1335	1729
						1731

***Note:** 220V and 380V are additional offerings for the Latin America Market.

WEIGHTS & DIMENSIONS

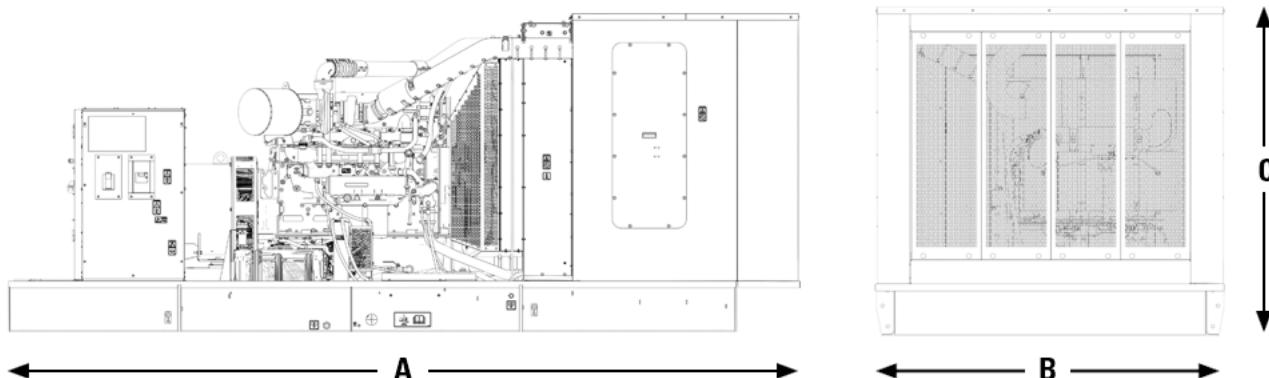

Standby Rating	Dim "A" mm (in)	Dim "B" mm (in)	Dim "C" mm (in)	Dry Weight kg (lb)
500 ekW	5310	2286	2179	5160

Note: General configuration not to be used for installation. See general dimension drawings for detail.

APPLICABLE CODES AND STANDARDS:

CSA C22.2 No 100-04, UL489, UL869, UL2200, IBC, IEC60034-1, ISO 3046, ISO 8528, NEMA MG 1-22, NEMA MG 1-33 and facilitates the compliance to NFPA 37, NFPA70, NFPA 99, NFPA110.

Note: Codes may not be available for all model configurations. Site level review needed for NFPA 70. Please consult your Cat Dealer for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

PRIME: Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated ekW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO 3046 standard conditions.

FUEL RATES: Based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/litre (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Caterpillar representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 BTU/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

³ UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.

*Governing Class capability as per ISO 8528-5. Consult your local Cat dealer for configuration and site specific transient performance classification.