

Cat® DE600S GC

Diesel Generator Sets



Standby: 60 Hz



Image shown may not reflect actual configuration

Engine Model	Cat® C15 In-line 6, 4-cycle Diesel
Bore x Stroke	137 mm x 171 mm (5.4 in x 6.8 in)
Displacement	15.2 L (928 in³)
Compression Ratio	16.1:1
Aspiration	Turbocharged Air-to-Air Aftercooled
Fuel Injection System	EUI
Governor	Electronic ADEM™ A4 - G3 Class* capable

Model	Standby 60 Hz kVA (ekW)	Emission Strategy
DE600S GC	750 (600)	Low BSFC

PACKAGE PERFORMANCE

Performance	Standby
	60 Hz
Genset power rating	750
Genset power rating with fan @ 0.8 power factor	600
Emissions	Low BSFC
Performance number	EM5511
Fuel Consumption	
Fuel tank capacity, Litres (US gal)	910 (240.4)
100% load with fan, L/hr (gal/hr)	151.7 (40.1)
75% load with fan, L/hr (gal/hr)	114.7 (30.3)
50% load with fan, L/hr (gal/hr)	79.8 (21.1)
Cooling System¹	
Radiator air flow, m³/min (CFM)	661 (23343)
Radiator air flow restriction (system), kPa (in. water)	0.125 (0.5)
Total coolant capacity, L (gal)	48 (12.7)
Inlet Air	
Max. combustion air intake restriction, kPa (in. water)	6.22 (25)
Combustion air inlet flow rate, m³/min (kg/hr)	43 (3016)
Exhaust System	
Exhaust stack gas temperature, °C (°F)	532 (991)
Exhaust gas flow rate, m³/min (CFM)	123.5 (4361)
Exhaust system backpressure (minimum allowable), kPa (in. water)	9.8 (39)
Exhaust system backpressure (maximum allowable), kPa (in. water)	17.2 (69.1)
Heat Rejection	
Heat rejection to jacket water, kW (BTU/min)	200 (11374)
Heat rejection to exhaust (total), kW (BTU/min)	586 (33325)
Heat rejection to atmosphere from engine, kW (BTU/min)	53.8 (3060)
Heat rejection to aftercooler, kW (BTU/min)	148 (8417)


DE600S GC Diesel Generator Sets

Electric Power



Alternator ²	60 Hz				
	480V	440V	220V	380V	240V
Voltages	480V	440V	220V	380V	240V
Motor starting capability @ 30% Voltage Dip, skVA	1955	1641	1641	1226	1955
Current, Amps	902	984	1968	1065	1804
Temperature Rise, °C	163	163	163	163	163
Frame Size	A3335L41				
Excitation	S.E				

WEIGHTS & DIMENSIONS

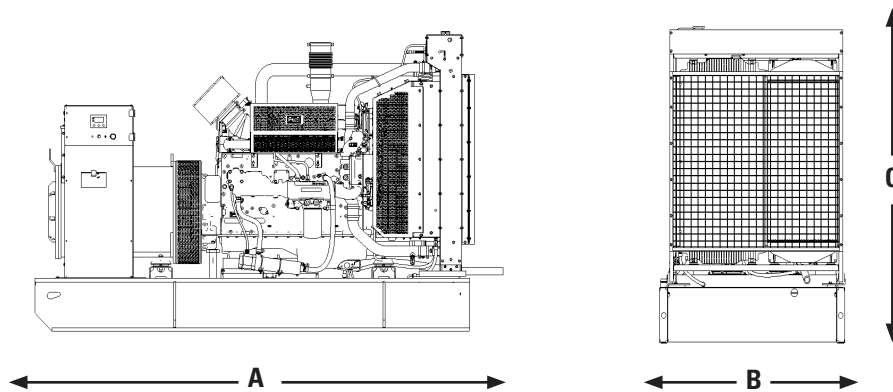

Length "A" mm (in)	Width "B" mm (in)	Height "C" mm (in)	Dry Weight kg (lb)
3328 (131.0)	1540 (60.6)	2187 (86.1)	3794 (8364.3)

Note: General configuration not to be used for installation. See general dimension drawings for detail.

APPLICABLE CODES AND STANDARDS:

AS1359, IEC60034-1, ISO3046, ISO8528, NEMA MG1-33, EAC, CE, UKCA.
 Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Generator temperature rise is based on a 40° C ambient per IEC60034-1.

* Governing Class capability as per ISO-8528-5. Consult your local Cat dealer for configuration and site specific transient performance classification.

LET'S DO THE WORK.™